

TABLE OF CONTENTS

Introduction 1

 Manual Format 2

 Part Design & Sketcher 3

 Launching 3DEXPERIENCE 4

 Assembly Design Screen 9

 Part Design Screen 10

 Pull-down Menus 11

 User/Collaborative Spaces 11

 Me 11

 Add 13

 Share 14

 Help 16

 Part Design Toolbars 17

 Sketcher Screen 26

 Sketcher Toolbars 27

 Standard Icons 27

 Manipulating the Display 31

 Three button mouse 31

 Two button mouse 31

 SpaceBall or SpaceMouse 31

 Keyboard 32

 Keyboard Shortcuts 33

 Searching the Database 34

 Navigation Tab 41

 Authoring Tab 47

 Creating a Part 49

 Renaming the Current Part 52

 Saving and Closing the Part 54

 Naming Convention & Saving 55

 Deleting Objects 58

 Creating a Sketch 62

Basic Sketcher 63

 Basic Shapes 63

 Rectangle 64

 Centered Rectangle * 65

 Oriented Rectangle * 66

 Parallelogram * 67

 Centered Parallelogram * 68

 Polygon * 69

 Circle 70

 Circle Through 3 Points * 71

 Circle with Cartesian Coordinates * 72

 Circle Tangent to 3 Elements * 73

 Arc Through 3 Points 74

Arc Through 3 Points with Limits *	75
Arc *	76
Ellipse *	77
Line	78
Infinite Line *	79
Bi-tangent Line *	80
Bisecting Line *	82
Line Normal to Curve	83
Axis Line	85
Point	86
Point by Using Coordinates *	87
Equidistant Points *	88
Intersection Point	90
Projection Point	91
Align Points	93
Spline *	95
Connect Curve *	97
Parabola *	99
Hyperbola *	100
Conic *	101
Elongated Hole	106
Cylindrical Elongated Hole *	107
Keyhole *	108
Text	109
Profiles	113
Constraints	130
Dimensional Constraints	130
Geometrical Constraints	130
Operations on Profiles	179
Corner	179
Tangent Arc *	184
Chamfer	185
Trim and Break	189
Specification Tree	195
Hide/Show	197
Basic Part Design	199
Basic Shapes	199
Pad	200
Pocket	211
Multiple Profiles *	215
Multi-Pad and Multi-Pocket	217
Shaft	220
Groove	224
Hole	227
Thread/Tap *	241
Rib	243
Slot	248
Solid Combine	251

Multi-Section Solids	253
Remove Multi-Section Solids *	255
Close Surface	256
Thick Surface	257
Shell	259
Stiffener	262
Operations on Shapes	266
Fillet	266
Chamfer	292
Drafts	299
Thickness *	307
Remove Face	309
Replace Face	311
Split Surface	313
Sew Surface	315
Modifying Values	316
Interfacing with Sketcher	321
Constraining to Faces Versus Edges	326
Advanced Sketcher	331
3D Elements on Sketch Plane	331
Construction Geometry	338
Advanced Constraints	341
Sketch Transformations	355
Sketch Analysis	365
Sketch Visualization	368
Advanced Part Design	371
Patterns	371
Rectangular	371
Circular	384
User-Defined	399
Exploding	402
Review	404
Part Transformations	406
Modifying Parts	415
Modifying Parameters	415
Inserting Objects	417
Scanning the Specification Tree	419
Modifying Properties	420
Replacing Sketches	425
Changing a Sketch Support	426
Positioned Sketches	428
Cut, Copy, and Paste	431
Reordering the Specification Tree	434
Modifying Parts Review	436
Inserting Bodies and Boolean Operations	440
Inserting Part Bodies	440
Boolean operations	441

Annotations	451
Applying Materials	455
Sectioning	459
Delete Useless Elements	463
Delete All Except	464
Recommended Modeling Practices	466
Sketcher considerations	466
Part Design Considerations	467
Interactive Review	468
Problems	489
Problem #1.0	489
Problem #2.0	490
Problem #3.0	491
Problem #4.0	492
Problem #5.0	493
Problem #6.0	494
Problem #7.0	495
Problem #8.0	496
Problem #9.0	497
Problem #10.0	498
Problem #11.0	499
Problem #12.0	500
Problem #13.0	501
Problem #14.0	502
Problem #15.0	503
Problem #16.0	504
Problem #17.0	505
Problem #18.0	506
Problem #19.0	507
Problem #20.0	508
Problem #21.0	509
Problem #22.0	510
Problem #23.0	511
Problem #24.0	513
Problem #25.0	514
Problem #26.0	515
Problem #27.0	516
Problem #28.0	517
Problem #29.0	518
Problem #30.0	519
Problem #31.0	520
Problem #32.0	521
Problem #33.0	522
Problem #34.0	523
Problem #35.0	524

Appendix A	525
Customize - Start Menu	525
Customize - Sections	526
Customize - Action Pad	526
Customize - Commands	527
Customize - Options	527
Appendix B	529
General - PCS	529
General - Display - Tree Appearance	530
General - Display - Tree Manipulation	531
General - Display - Visualization	532
General - Parameters and Measure - Units	534
General - Parameters and Measure - Constraints and Dimensions	535
Infrastructure - 3D Shape Infrastructure - General	536
Infrastructure - 3D Shape Infrastructure - Display	537
Infrastructure - 3D Shape Infrastructure - 3D Shape	538
Infrastructure - 3D Shape Infrastructure - Graphic Properties	539
Mechanical - Part Design	540
Mechanical Design - Sketcher	541
Appendix C	543
Reference Geometry	543
Offset from plane	543
Parallel through point	545
Angle/Normal to plane	546
Through three points	547
Through two lines	548
Through point and line	549
Through planar curve	550
Normal to curve	551
Equation	552
Tangent to surface	553
Mean through points	553
Appendix D	555
Measurement Tools	555
Measure Item	556
Measure Between	563
Measure Inertia	570
Appendix E	575
Advanced Dress-Up Features	575
Draft Both Sides	575
Advanced Draft	586
Automatic Draft	589
Automatic Filletting	591

Introduction

CATIA 3DEXPERIENCE Part Design and Sketcher

Upon completion of this course the student should have a full understanding of the following topics:

- Creating sketches
- Constraining sketches
- Modifying sketches
- Creating parts
- Modifying parts
- Performing boolean operations on parts
- Basic use of surfaces in part design
- Applying materials to parts

Manual Format

It is important to understand the format of the manual in order to use it most effectively. This manual is designed to be used along with an instructor; however, you will need to do a lot of reading as well, in order to fully understand CATIA 3DEXPERIENCE. The exercises in this book will list steps for you to complete, along with explanations that try to inform you about what you have just done and what you are getting ready to do. The actual steps are in bold type and the information that follows the steps is for your benefit. Anything that appears in *italics* refers to a message CATIA provides—this includes information in pull-down menus, pop-up windows, and other messages.

An example of a step and its explanation is shown below (note: normally the lines will not be there):

Select a location to the right of the origin. This specifies the other end point of the line. You will continue specifying locations in order to complete your profile. It should appear similar to the diagram shown below.

As you can see, the desired action blends in with the text except that it appears in bold. The information following the step explains what that step accomplished and where you are going next. It is important to read this information in order to better your understanding of CATIA 3DEXPERIENCE.

Also, you will find that the exercises build upon themselves. Later exercises often assume you know how to do certain steps which have been covered earlier in the course. If you did not quite pick up what you needed to know from an exercise, you will probably want to review it several times before moving onto more advanced sections. The advanced sections assume that you have a good understanding of the previous sections. Therefore, fewer steps will be provided. Eventually, you are expected to be able to create parts without any steps.

Part Design & Sketcher

CATIA 3DEXPERIENCE uses the Sketcher app as its principal method to create profiles. These profiles can be shaped and located via many different types of constraints. The first objective of the course is to learn how to use Sketcher and how to constrain profiles to the desired specifications. Sketcher is a very powerful method for creating profiles, and it is easy to use.

The second objective of the course is to use these sketches in Part Design. The sketches define two-dimensional cross-sections to be used for design three-dimensional shapes. There are several different shapes that can be made and various operations that can be performed on them. By combining these shapes and operations, you can design a variety of parts.

The third objective of the course is to familiarize you with the advanced methods of creating sketches and parts. This includes using construction geometry and projecting three-dimensional geometry onto the sketch plane. It also includes the use of formulas to set up typical values at multiple locations, as well as, more complex formulas to provide a more dynamic sketch. In terms of part design, you will learn how to use multiple parts and how to perform boolean operations on them.

The fourth objective is to become efficient at modifying your designs. You can modify your design either by changing the parameters of a part operation, or by modifying the sketch that was used. This is a fairly simple process in CATIA 3DEXPERIENCE, and it is the real strength of Part Design.

The fifth objective is to introduce the use of wireframe and surfaces in the part design process, and how to apply various materials to your design. This is meant only to be an introduction, and it is not a complete course on these subjects.

In conclusion, you should be able to design many parts using the Sketcher and Part Design apps in an efficient manner. You may find it frustrating at first, but it should feel very natural by the end of the course.


Profiles

This section will discuss the **Profile** icon. It is perhaps the most commonly used icon when defining sketches. The following exercises demonstrate the usefulness of the **Profile** icon, and how to utilize it effectively. It can create simple shapes and complex shapes within one operation.

The typical method of using the **Profile** tool is to specify the corner points of the desired shape. CATIA will generate lines between those points until you either select on the **Profile** icon again, double select a location in the workspace, or select the starting point to close the profile. You can also use sub-options that appear in the Sketch tools toolbar to generate curves as you are defining the profile. Alternatively, you can generate a tangent curve by using the first mouse button while sketching with the **Profile** icon. This will be done in a later exercise.

When defining a profile, the geometry may turn blue, or blue constraint symbols may appear. This indicates that a constraint will be created if a location is selected at that moment. It is useful for defining horizontal and vertical lines, or for defining tangencies with arcs and circles.

You will now build several profiles to practice using the various capabilities of the **Profile** icon. The first profile you are going to build looks like the one shown here.

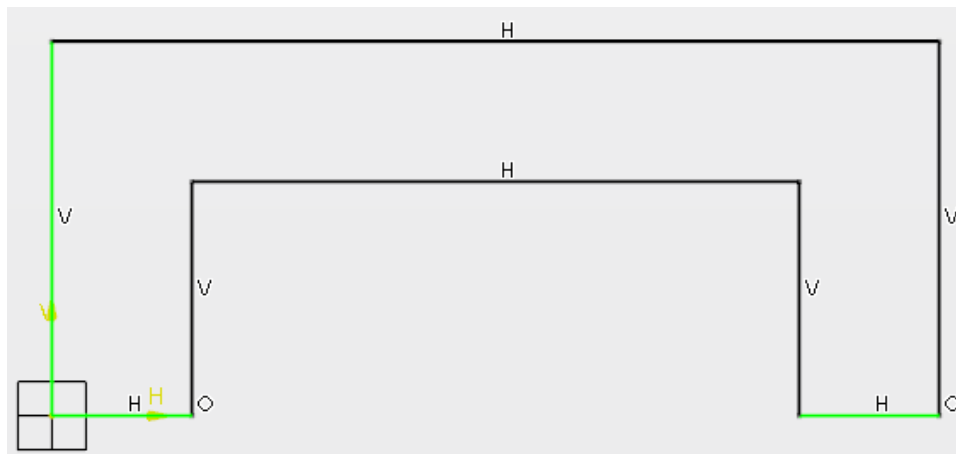


Select the Profile icon.  It should be highlighted.


Select the origin point of the sketch plane. This specifies the starting point for your profile. When you specify the next location, make sure the line appears blue before selecting in the workspace. This will place a vertical constraint on your element automatically.

Note: If the automatic constraints become problematic while you are sketching, you can hold down the Shift key to temporarily ignore constraints. Once you release Shift, constraints will be recognized again.


Select a location above the origin. If the line turned blue before you selected the second location, it should appear with the vertical constraint on it like the one shown below. Make sure when you specify the other locations that those elements also appear blue before selecting in the workspace.

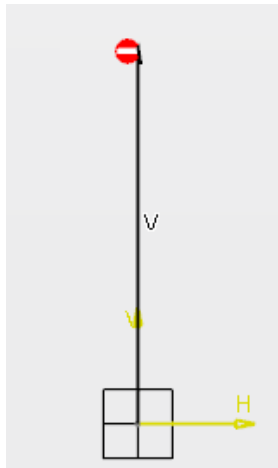


Select a location to the right of the previous location. It should appear with the horizontal constraint on the element and look similar to the diagram shown below.

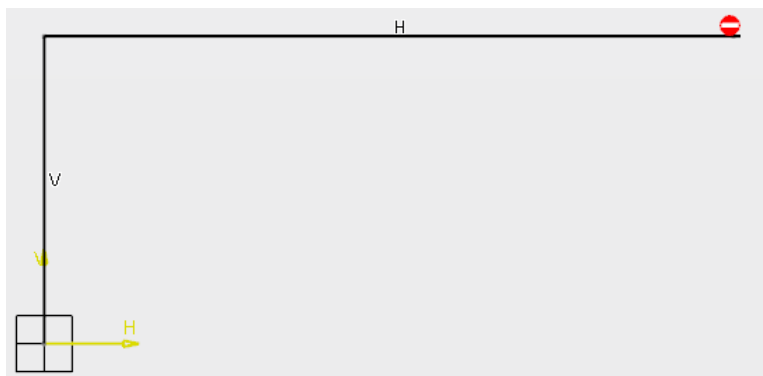


Select a location below the previous location and on the H axis. It should appear similar to the diagram shown below. You might notice a little, green circle appear. This is a coincidence constraint. This coincidence constraint forces the end point to be aligned with the H axis. This and other constraints will be discussed in more detail later on.

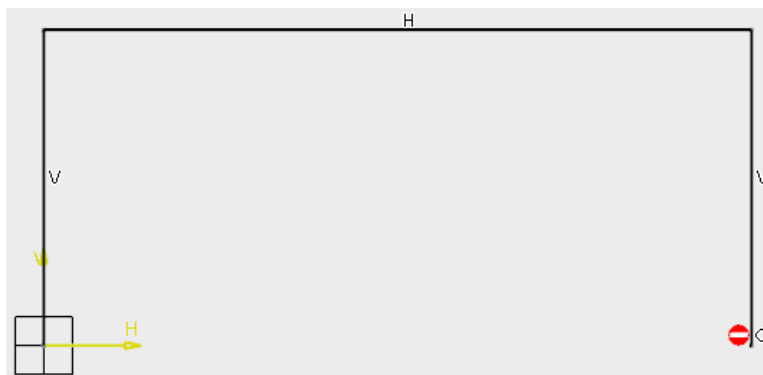


Select a location to the left of the previous location. You may have noticed that the first vertical line and the shorter horizontal line both turned green. This means they are iso-constrained. Constraints will be discussed with greater detail in later exercises.

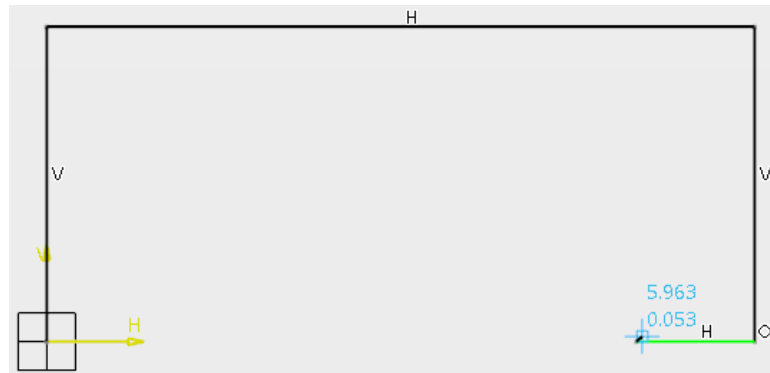


Select a location above the previous location. It should appear similar to the diagram shown below.

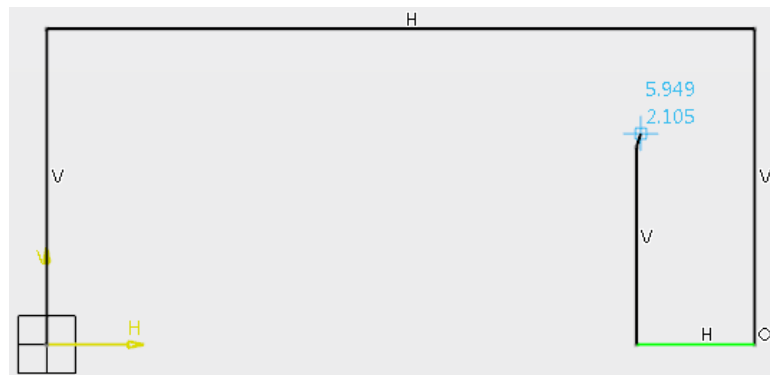


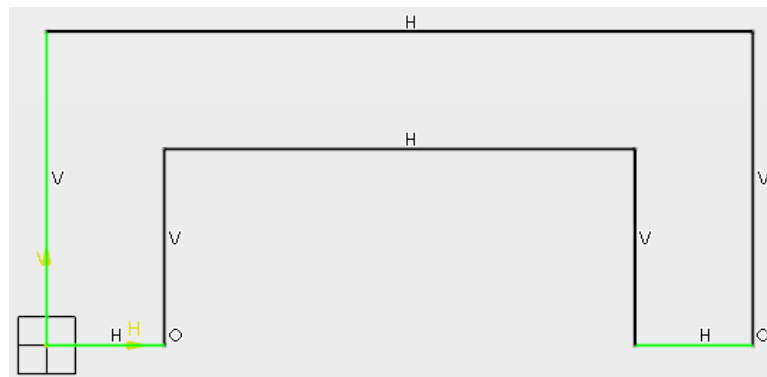
Select a location to the left of the previous location.

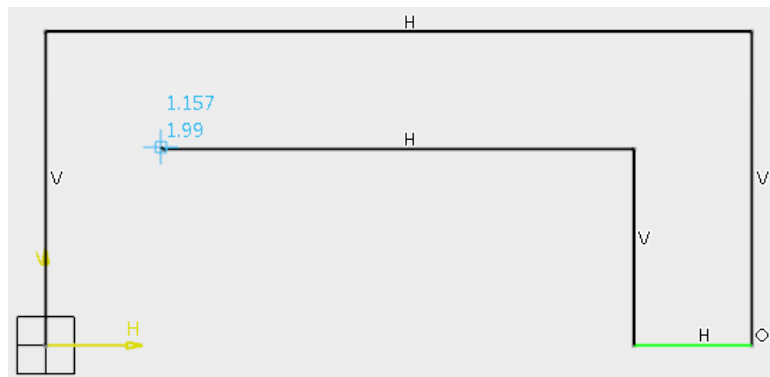

Select a location below the previous location. Your sketch should look similar to what is shown here.

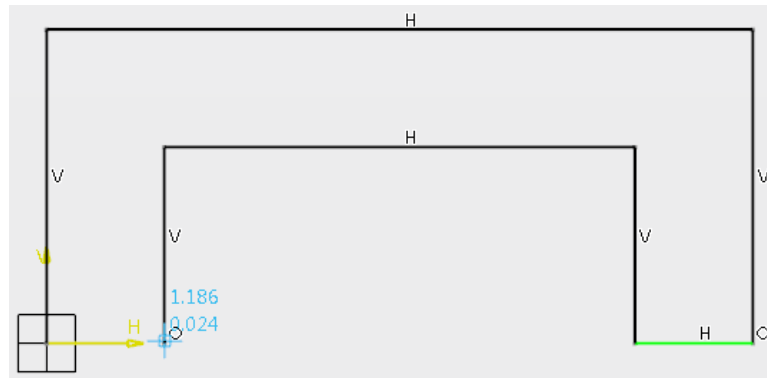




Select the origin point of the sketch again. As long as you create the entire profile at one time, selecting the start point again will close the profile and end the command. You can undo selections in the middle of creating your profile by using the Undo icon, or by using the Ctrl Z keyboard shortcut.  The Undo icon is a standard icon so it is available on each of the toolbar sections.




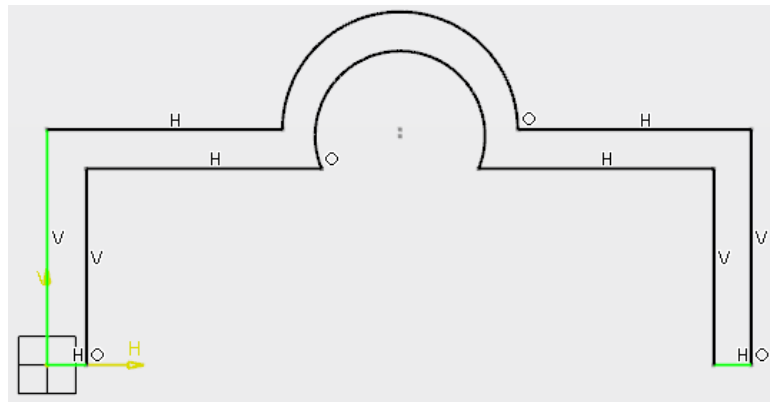
The sub-options for the **Profile** icon are available within the *Tools Palette* toolbar and are shown below.



-  Line
-  Tangent Arc
-  Three Point Arc


You will now perform a sketch with the **Profile** icon by using the **Three Point Arc** sub-option. It allows you to define an arc without having to exit the **Profile** command.

Select the Profile icon.  The next profile you are going to build looks like this.





Select the origin point of the sketch plane. This specifies the starting point for your profile. When you specify the next location, make sure the line appears blue before selecting in the workspace. This will place a vertical constraint on your element automatically.

Select a location above the origin. If the line appeared blue before you selected the second location, it should appear with the vertical constraint on it like the one shown below. Make sure when you specify the other locations for the lines that they also appear blue before selecting in the workspace.




Select a location to the right of the previous location. It should appear similar to the diagram shown below.




Select the Three Point Arc icon from the Tools Palette toolbar.  This icon will allow you to specify a location for the arc to pass through and a location for the arc to end at. The arc will begin at the last location specified, which, in this case, is the endpoint of the horizontal line.

Select up and to the right of the previous location. This specifies the location that the arc should pass through. The next point specifies the endpoint of the arc.


Select down and to the right of the previous location. This location should be straight across from the start of the arc. It should appear similar to the diagram shown below. Notice how the Three Point Arc icon in the Sketch tools toolbar automatically turned off and the Line icon turned back on.

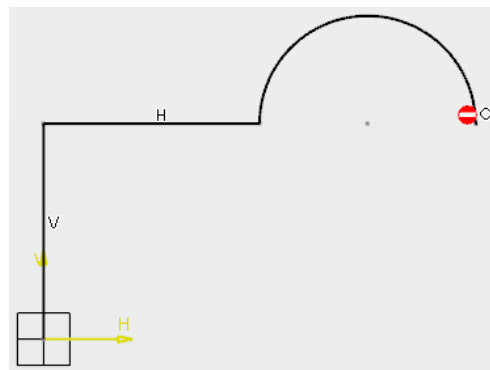


Select to the right of the previous location.

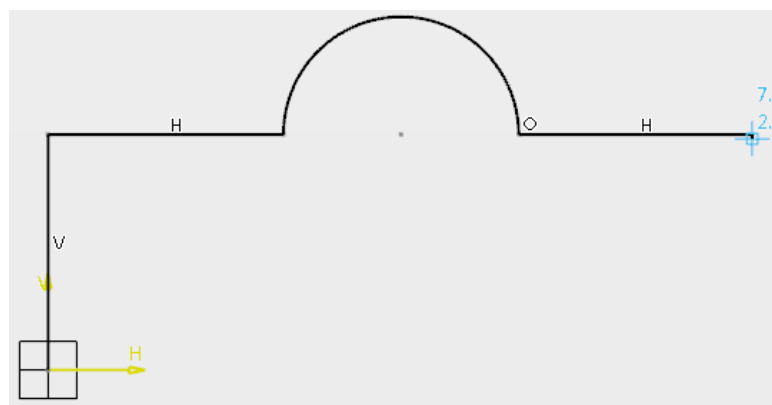


Select below the previous location, on the *H* axis. It should appear similar to the diagram shown below.

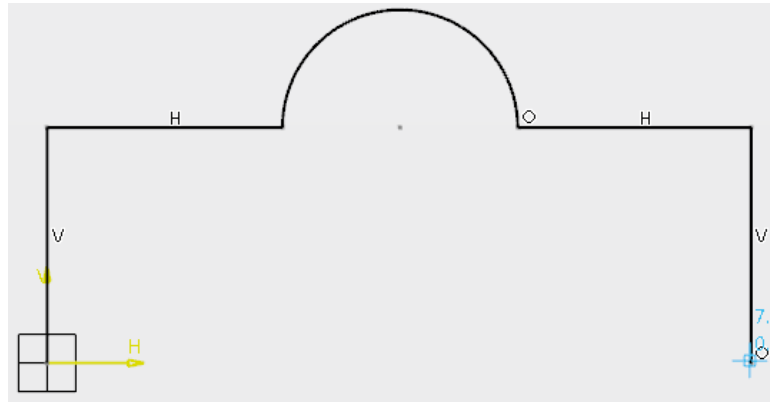


Select to the left of the previous location.

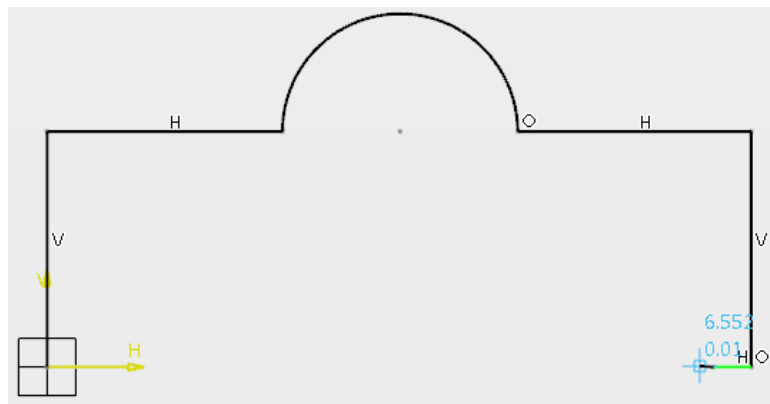


Select above the previous location, as shown below.

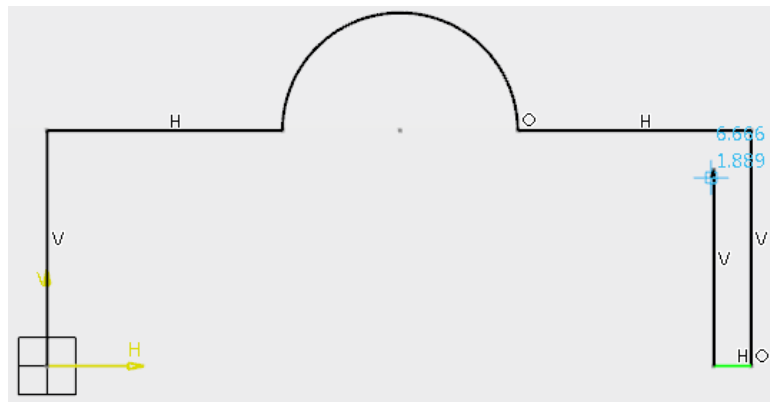


Select to the left of the previous location.

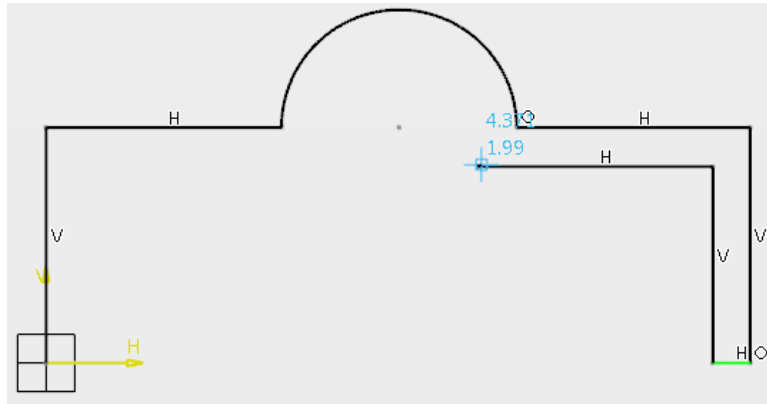


Select the **Three Point Arc** icon, then select up and to the left of the previous location.

 This is the location that the arc will pass through. The next point specifies where the arc will end.


Select down and to the left of the previous location. This location should be straight across from the start of the arc. It should appear similar to the diagram shown below.

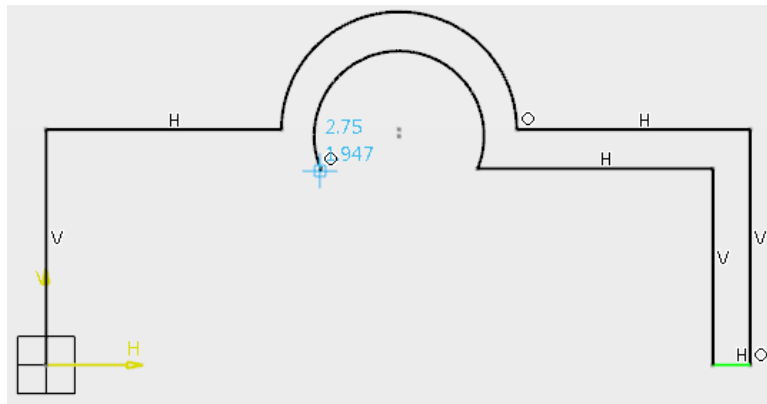


Select to the left of the previous location.

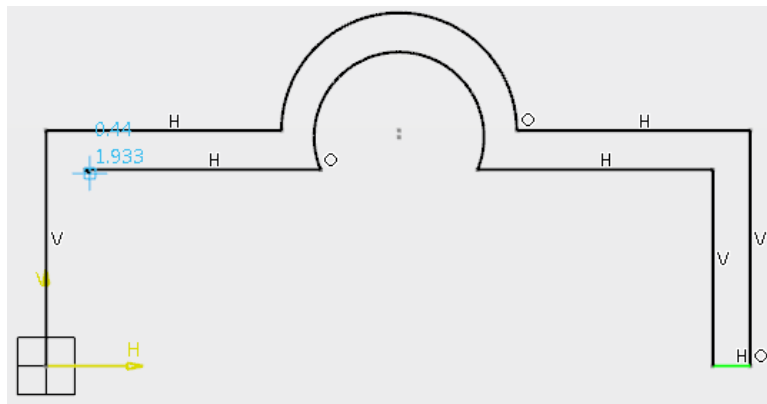

Select below the previous location. It should appear similar to the diagram shown below.

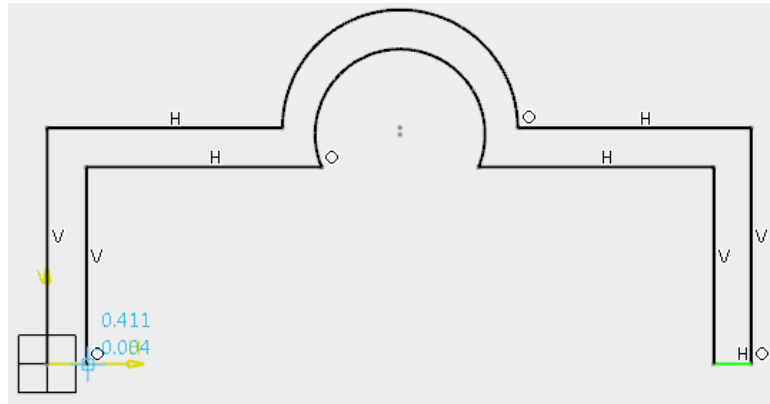


Select the origin point of the sketch again. CATIA closes the profile and exits the Profile command.

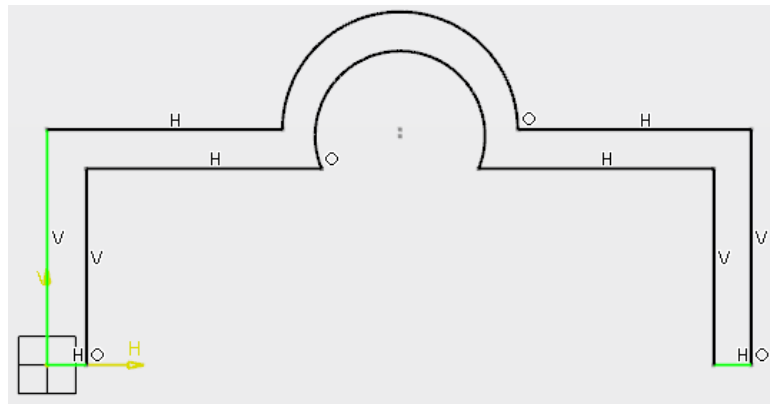

Pad

The **Pad** option allows you to use a sketch and extrude it in a linear direction to produce a solid pad. You can create a sketch or profile on-the-fly by pressing the third mouse button while in the *Selection* box. This allows you to use one of the available options to define a profile if you did not already have one created. When you create a pad, the *Pad Definition* window appears as shown here.

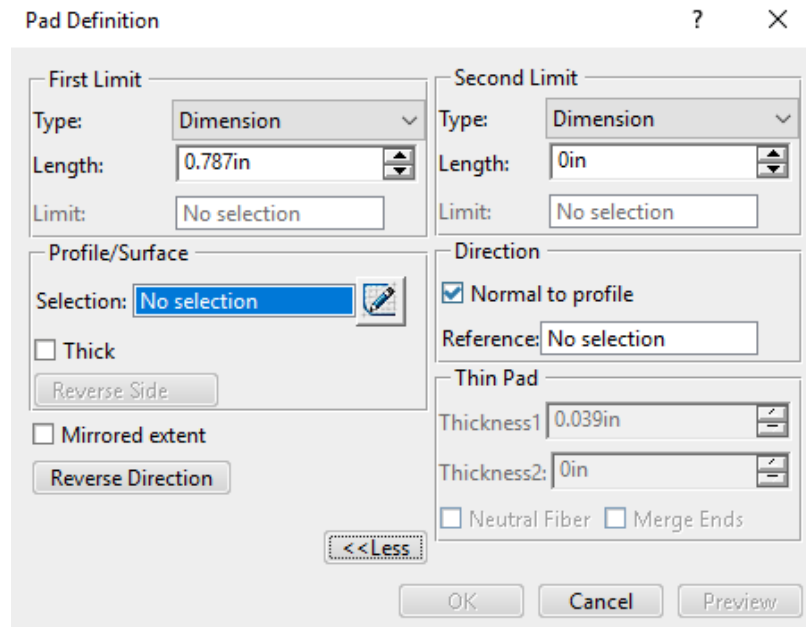

Initially, the window will appear with only the *First Limit* displayed. You must select the *More >>* button to see the *Second Limit* and *Thin Pad* options. Since the options are the same for both limits, they will only be discussed once.

Type

<i>Dimension</i>	Allows you to enter a length value
<i>Up to next</i>	Extends to the next feature of an existing part
<i>Up to last</i>	Extends to the last feature of an existing part
<i>Up to plane</i>	Extends to a specified plane, which is its <i>Limit</i>
<i>Up to surface</i>	Extends to a specified surface, which is its <i>Limit</i>


Profile/Surface


<i>Selection</i>	Specifies which sketch will be used; you have the option to modify the sketch using the Sketcher icon next to the box. You can also select a surface to use as your profile.
<i>Thick</i>	Toggles the <i>Thin Pad</i> option. This allows you to add a wall thickness to the elements that make up the sketch.

<i>Reverse Side</i>	Reverses the side an open profile will use to determine its shape
<i>Mirrored extent</i>	Applies only when the <i>Type</i> is set to <i>Dimension</i> ; the pad will extend the same distance in both directions, thereby eliminating the need for a second limit
<i>Reverse Direction</i>	Extrudes the pad in the opposite direction
<i>Direction</i>	
<i>Normal to profile</i>	Forces the pad to extrude normal to the sketch plane
<i>Reference</i>	Extrudes the pad along a user-specified direction
<i>Thin Pad</i>	
<i>Thickness1/2</i>	Specifies the wall thickness that will be applied to each sketch element
<i>Neutral Fiber</i>	Forces the sketch element to be in the center; the wall thickness is added to both sides equally
<i>Merge Ends</i>	Extends or trims the elements to existing material

When you select a *Type* other than *Dimension*, you will have the option to specify an *Offset* value from the corresponding limit.

Open the PDAS - Pad1 document. There are two sketches already created for you.

Select the Pad icon.  You will be able to create a pad using one of the sketches. This exercise is going to cover the various methods that you can use to create pads. A *Pad Definition* window should appear similar to the one shown below.

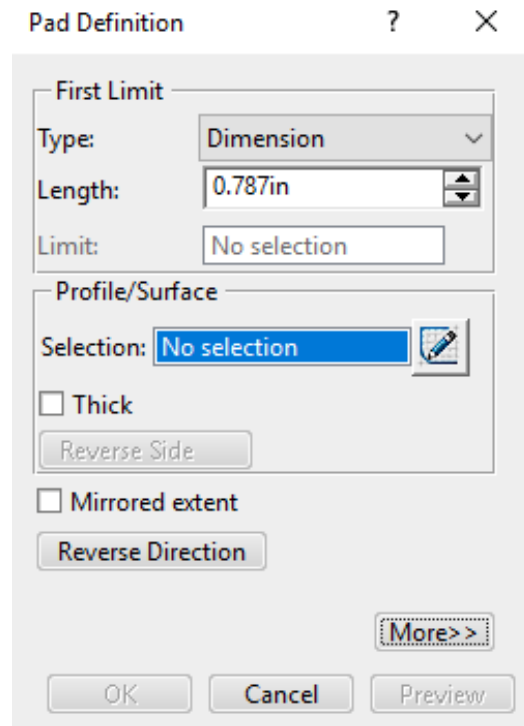

Select *Sketch.1* from either the graphical area or the tree. This will be the profile for the pad feature. You are going to use the basic option of keying in a length for the *First Limit*. You will also preview what the *Mirrored extent* and *Reverse Direction* options do.

Change the *Length* to 4.0. Do not press Enter yet. Doing so will automatically create the pad with the specified value. For now, you are going to want to *Preview* the pad in order to see what CATIA is doing until you understand the different options.


Select *Preview*. A preview of the pad appears. You will now change some of the other options to see the differences between them.

Select *Mirrored extent*, then select *Preview*. As you can see, instead of the pad extending in only one direction, it now extends four inches on both sides. Your sketch is being used as the mirror plane.

Select *Mirrored extent* again to turn it off, then select *Preview*. Now you are going to reverse the direction of the pad so that it will extend in the opposite direction only.


Select *Reverse Direction*, then select *Preview*. The pad is still going to be four inches wide. This is the side you want to create the pad on.

Select OK. The pad should appear similar to the diagram shown below. The sketch was automatically hidden after being used by the pad. This is due to a setting under the pull down menu *Preferences*.

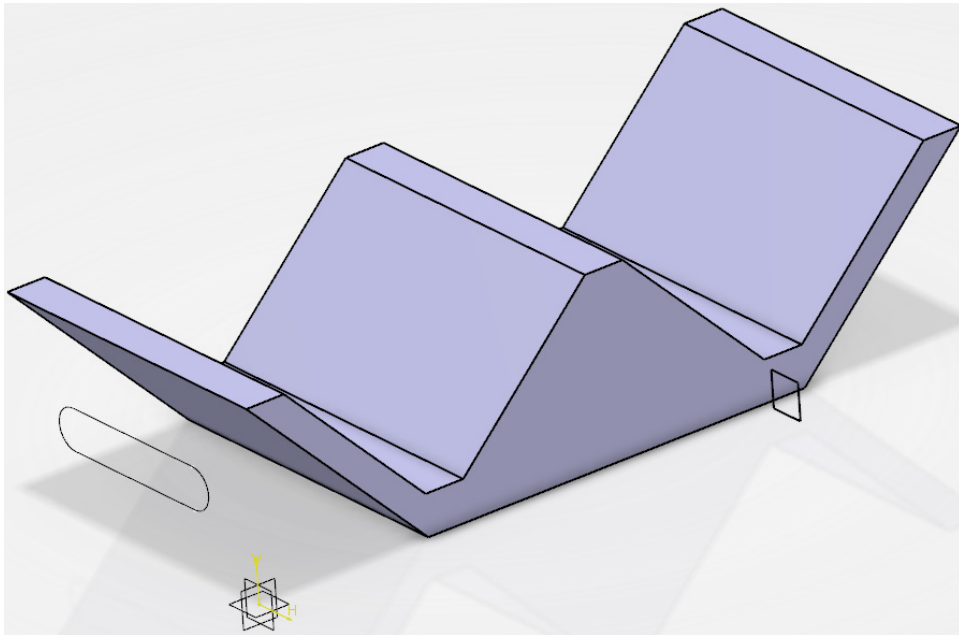

You are now going to explore the other *Types* you can use to define limits for your pads.


Select the Pad icon.  The *Pad Definition* window appears.

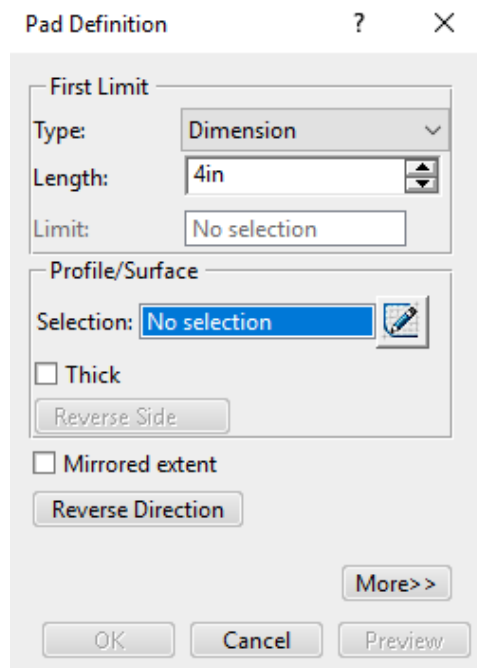


Select Sketch.2. This specifies the sketch you want to use for the next pad.

Select Reverse Direction so that it extends toward the other pad. Now you are going to see what the other *Types* allow you to do.

Change the *Type* to *Up to next* and select *Preview*. Notice that the pad only goes to the next side of the other pad. It should appear similar to the diagram shown below.

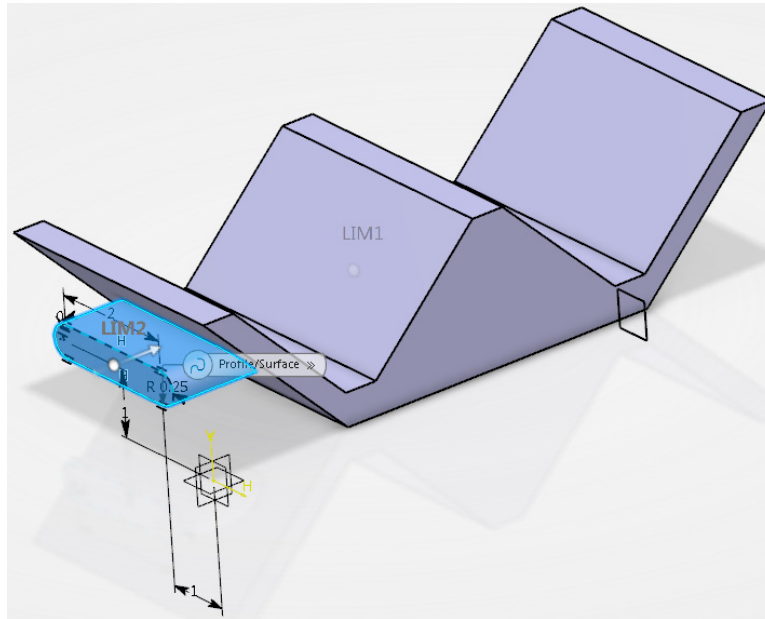


Change the *Type* to *Up to last* and select *Preview*. Notice that the pad goes all the way to the last side of the previous part. It should appear similar to the diagram shown below.

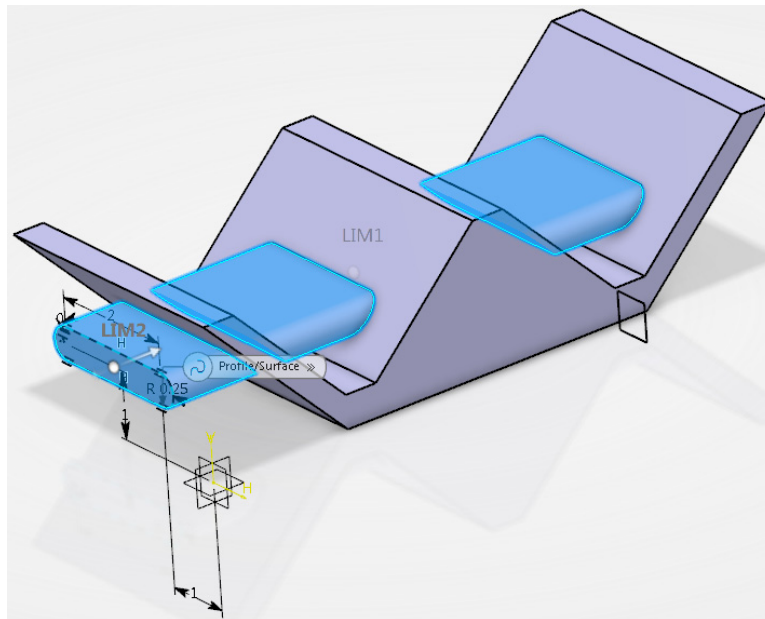

Change the *Type* to *Up to plane*. When you use this option you have to specify a plane or a planar side that you want the pad to be limited by.


Select the plane indicated below, then select *Preview*. Notice that the pad goes up to the plane and then stops. It should appear similar to the diagram shown here.

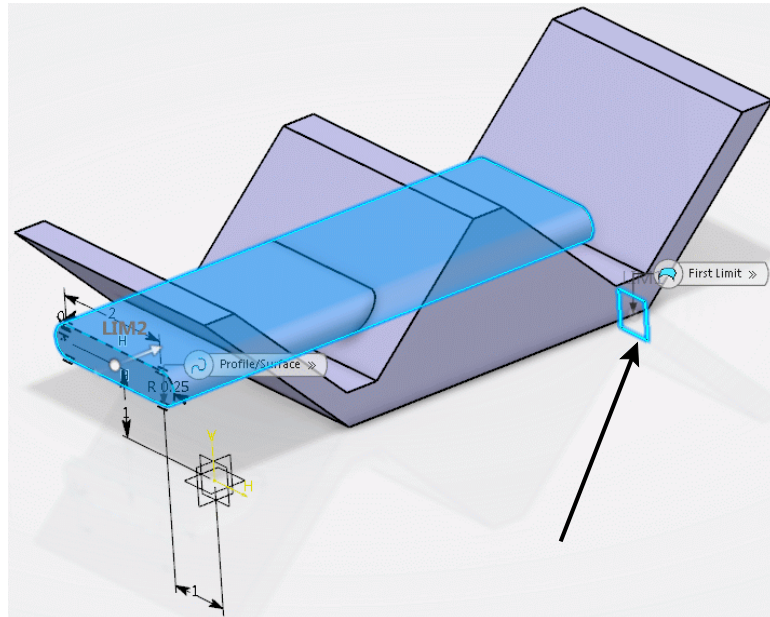


You may have to rotate the part around in order to see the limitation better. The *Up to surface* option works very similar to the *Up to plane* option, except that you can specify a surface instead of a plane.

The *Offset* field is now available, and you are able to enter both positive and negative values. A positive value will extend the pad beyond the limit by the specified amount, whereas a negative value will stop the pad short of the limit by the specified amount.

Enter 0.25 for the *Offset*, then select *Preview*. From the side, you can see that the pad extends past the selected limit plane.

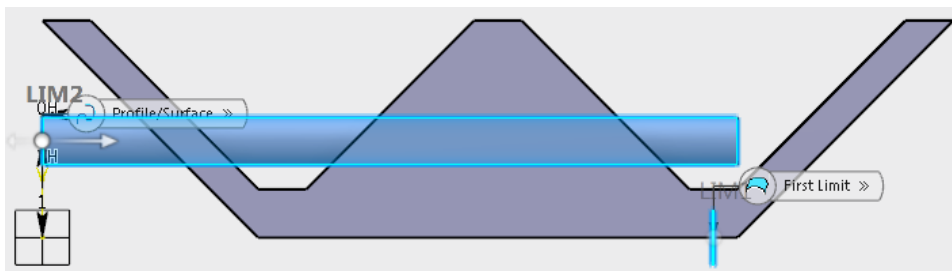


Select the **More >>** option. This expands the window to reveal more options. Your window should appear similar to this.

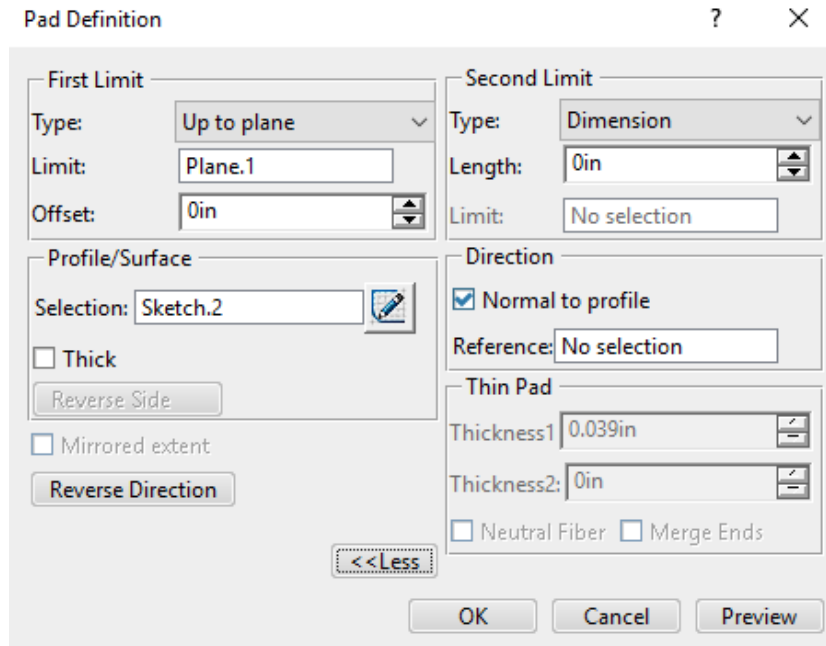


Currently, the *Direction* is specified as *Normal to Profile*. You will turn this off and specify an element to be used for the direction instead.

Turn off the *Normal to Profile* option and select in the *Reference* field, then select the angled edge closest to the origin as shown below and select *Preview*. The pad extrudes in the direction of the line and stops at the plane specified earlier. It should appear similar to the diagram below.

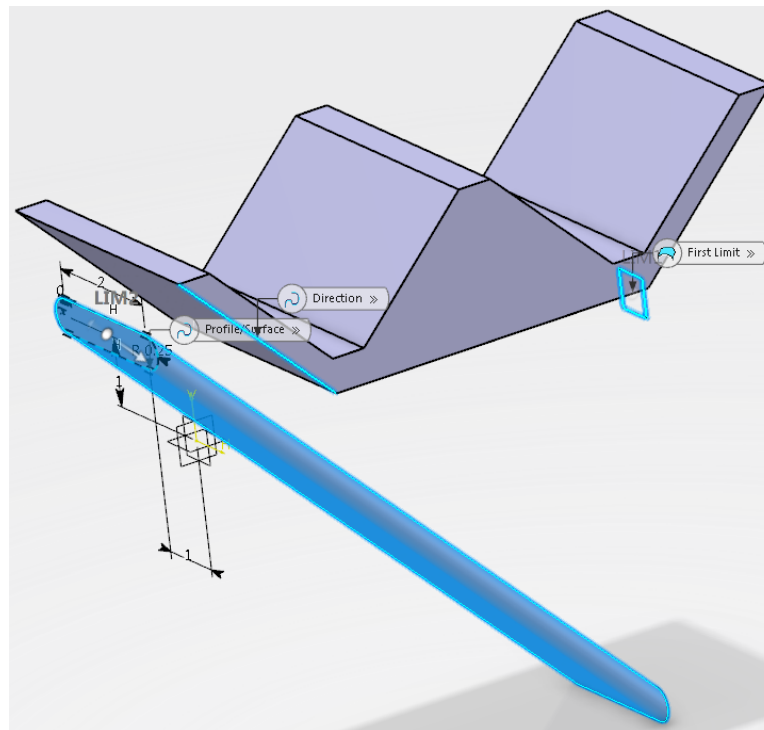


Select Normal to Profile. The direction is once again normal to the sketch plane. You will now use a *First Limit* and a *Second Limit* together to create the pad.


Under the *Second Limit*, change the *Type* to *Up to plane*, then select the face indicated below and click *Preview*. Your pad will now exist between the plane selected for the *First Limit* and the selected face for the *Second Limit*, plus the offset value. You can use faces for the *Up to Plane* option as long as they are planar. You can also use planes for the *Up to Surface* option.

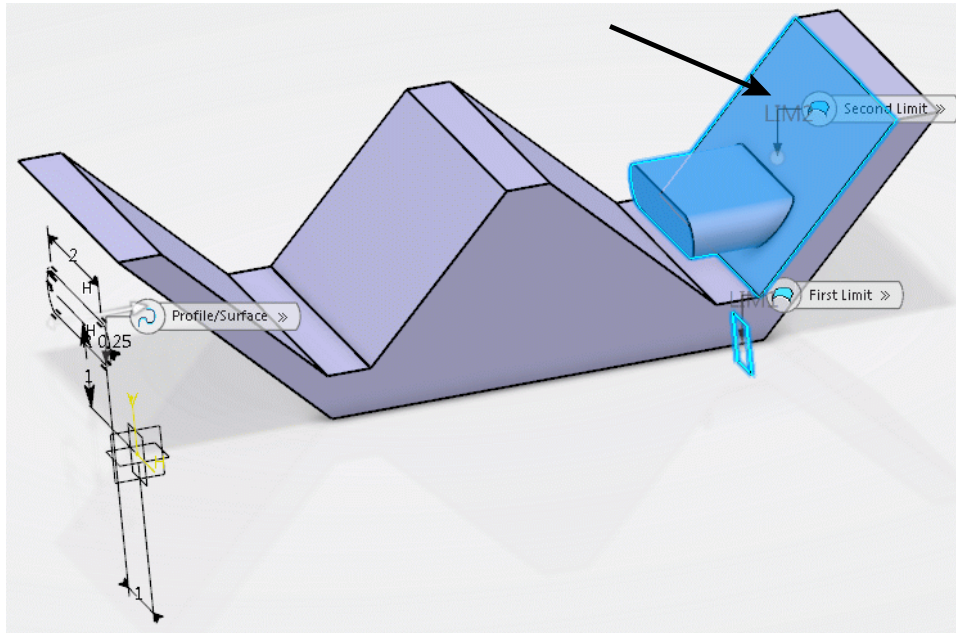

Change the *Type* for the *First Limit* to *Up to Surface* and select the face closest to *Sketch.2*, then enter *0.0* for the *Offset* and select *Preview*. Your pad should appear as depicted below.

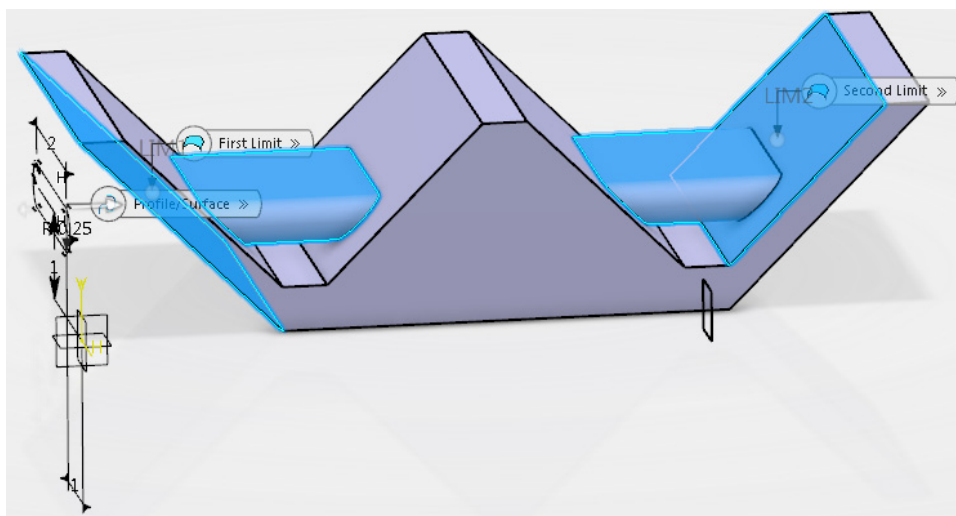

Select OK. The final part should look similar to the image below.

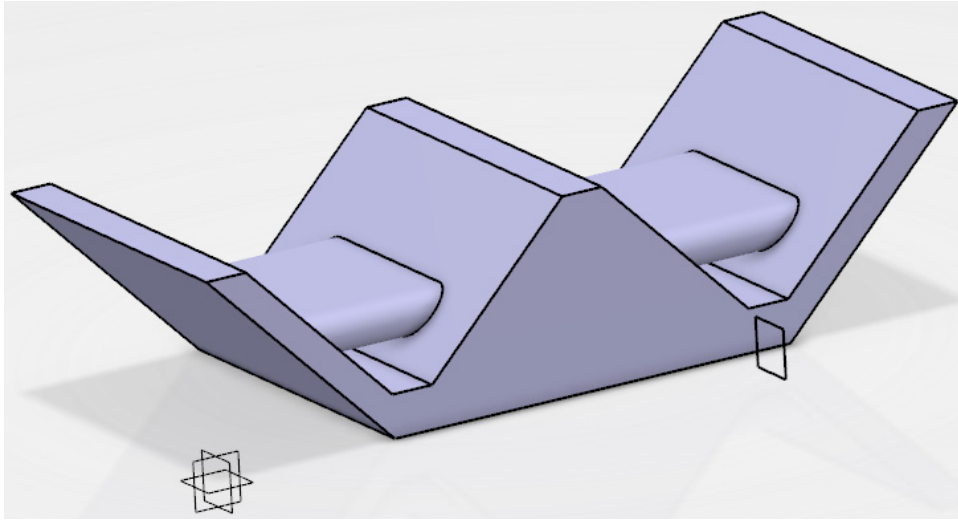


This exercise showed most of the options available when creating a pad. There are other shapes you will see that have some of the same options. Hopefully, you have a good understanding of what each option allows you to do.


Note: Open profiles (sketches) can be used to create pads or pockets, as long as they will be closed by the other faces of your existing part. You will see this demonstrated in the next exercise.

Save and close the document.

Open the PDAS - Pad2 document. A sketch has already been created. You are going to use the *Thin Pad* options to finish the model.

Select the Pad icon.  This will allow you to create a pad using the sketch. The *Pad Definition* window appears.

Select Sketch.1. A *Feature Definition Error* window appears. It is because your sketch contains some open profiles. However, this is okay since you will be using the *Thick* option.

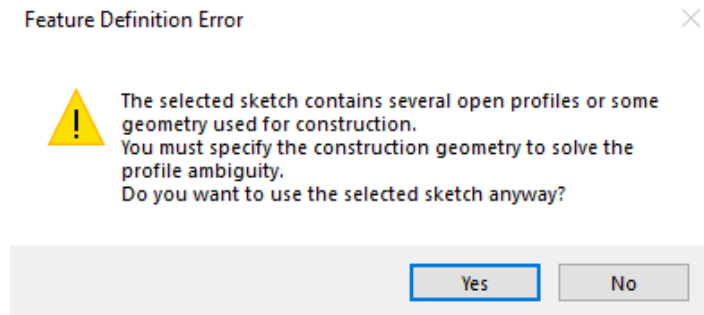


Select Yes, then select the Thick option. Whenever you are using an open profile, you will want to select the *Thick* option before doing anything else. Otherwise, you will continue to receive error messages until it is turned on.

Turn on Neutral Fiber and enter 0.1 for Thickness1. This option splits the specified thickness in half, distributing the solid evenly in both directions. Make sure the directional arrow in the graphical area is pointing toward the existing solid. If it is pointing away, select the *Reverse Direction* button.

Change the First Limit to Up to surface and select the outer face of the part. You will have to rotate it in order to select the outside surface.

Select OK. Your part should appear similar to the diagram shown below.

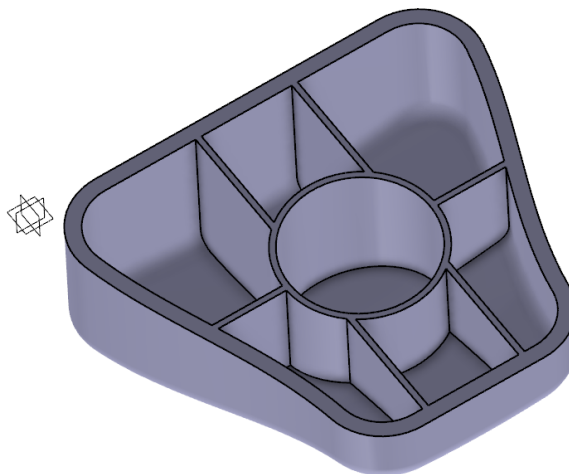



Save and close the document.

Open the PDAS - Pad3 document. There are three sketches already created for you.


Select the **Pad** icon.  The *Pad Definition* window appears.

Set the *Type* to *Dimension* with a *Length* of **0.75**, then select *Sketch.1* and click **OK**. The pad should appear similar to the diagram shown below.

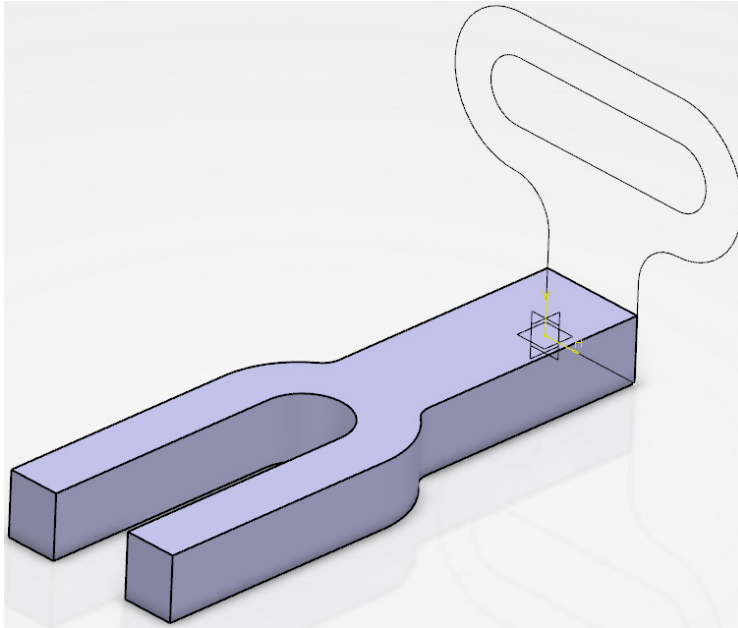

Select the **Pad** icon again, then select *Sketch.2*. 

Set the *Type* to *Dimension* with a *Length* of **0.75**, then select **OK**. Your part should look like this.

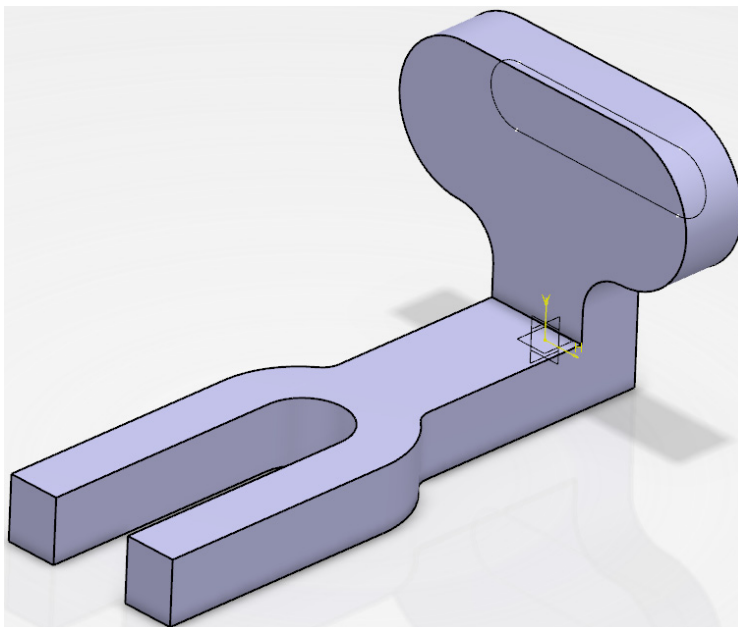

Do not close the document; you will continue to use it for the next exercise.